


## Configuration 2:

### ATP registration numbers of vehicle

ATP type approval no. of refr. unit	3426MT rev1
ATP type approval no. of insulated box	222090
ATP type approval no. of body	GL-22 2090
Vehicle ATP certificate no.	457
Vehicle identification no.(VIN)	WSM000005SV048602
Insulated box serial number	61390000

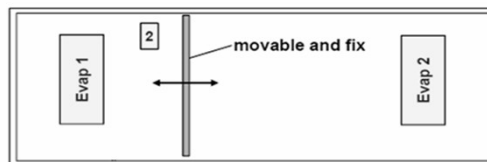

Data of overall body	Internal dimensions			Floor material	K value of outer body
	L	W	H		
	13,41 m	2,46 m	2,70 m	Alu	0,38 W/(m².°C)

## A. Input data

### A1. Data of insulated body

Data of internal bulkheads	Movable or fixed	Thickness	K value [W/m².°C]
Transversal bulkhead (1→2)	movable	53 mm	3,2

Dimensions / Use of Compartments	Internal length		Fixed temperature in each comp.?	Compartment temperature	Dry freight use?	Lowest class temp. permitted in each comp.?	Lowest permitted temp. per comp.
	Minimal length	Maximal length					
Compartment 1	7,66 m	12,56 m	No	-20 °C	Yes	Yes	-20 °C
Compartment 2	0,80 m	9,75 m		20 °C	Yes		0 °C

### A2. Data of multitemp refrigeration unit

Cooling capacities at:	-20 °C
Nominal refr. cap. host unit	9226
Individual refr. cap. evap. 1	9268
Individual refr. cap. evap. 2	6695

Additional constraints on combinations of temperatures when 'Fixed temperature in each comp.'='No':

1. Two compartments are never used at the same temperature.

## B. Result of calculation (incl. dimensioning factor 1,75)

### B1. Sufficient refrigerating capacity?

Nominal refrigerating capacity:	Ok
Minimally required nominal refr. cap.	6 022 W
Effective refrigerating capacity	Ok

Minimal bulkhead thicknesses do not meet ATP requirements

### B2. Maximum refrigerating demand in each compartment

Individual refrigerating demand in each compartment	Maximum refrigerating demand in compartment 1						Maximum refrigerating demand in compartment 2					
	Refr./heat. demand	Tempe-ratures	Required rel. run. times	Available effect. refr. capacity	Internal length	Internal width	Refr./heat. demand	Tempe-ratures	Required rel. run. times	Available effect. refr. capacity	Internal length	Internal width
Compartment 1	6 022 W	-20 °C	65%	9 268 W	12,56 m	2,46 m	-920 W	20 °C	0%	0 W	7,66 m	2,46 m
Compartment 2	-1 390 W	20 °C	0%	0 W	0,80 m	2,46 m	3 667 W	-20 °C	55%	6 695 W	5,70 m	2,46 m
Collective:	6 022 W		65%	9 268 W			3 667 W		55%	6 695 W		

### B3. Maximum collective refrigerating demand of all compartments

Maximum collective refrigerating demand	Refr./heat. demand	Tempe-ratures	Required rel. run. times	Available effect. refr. capacity	Internal length	Internal width
Compartment 1	6 022 W	-20 °C	65%	9 268 W	12,56 m	2,46 m
Compartment 2	-1 390 W	20 °C	0%	0 W	0,80 m	2,46 m
Collective:	6 022 W		65%	9 268 W		

### B4. Maximum collective relative running time of all compartments

Maximum collective refrigerating demand	Refr./heat. demand	Tempe-ratures	Required rel. run. times	Available effect. refr. capacity	Internal length	Internal width
Compartment 1	6 022 W	-20 °C	65%	9 268 W	12,56 m	2,46 m
Compartment 2	-1 390 W	20 °C	0%	0 W	0,80 m	2,46 m
Collective:	6 022 W		65%	9 268 W		

Nom de l'autorité compétente:



Adresse:  
5 avenue des prés  
CS20029  
94266 - Fresnes  
France

+33 (0) 1 49 84 84 84  
contact@cemafruid.fr

Le / on : 2025/11/25

L'autorité compétente / The competent authority  
Cemafruid SAS  
Responsable ATP / Responsible for the ATP

Le Président de CEMAFRUID SAS

TECNEA SAS représentée par son Président Géraud CAVALIER